



since 1960

general catalogue 2013

Italian leader for the production of flushing cistern and accessories, KARIBA S.p.A. has always known how to adapt to the running innovation of sector, thanks to the up-to-date technology achieved in nearly 50 years of experience and presence in the market.

The former successes and the ongoing research aimed to the achievement of continuously improving results, have led the company to a position of leadership in the technology of heating and sanitary application.



EXTERNAL CISTERNS



CONCEALED CISTERNS

Monolith 2011

PratiKa System

COVER PLATES

Classic line

Biblo line



WALL FRAMES

ACCESSORIES



PRODUCTS LIST and descriptions



exposed

close coupled suites

high level

special cisterns



cisterns

Super Kariba - Super E

single flush

DESCRIPTION:

- WC cistern for low, medium, high-level installations

SUPPLIED STANDARD:

- Kit of wall fixing accessories
- Flush pipe
- Coupling gaskets
- Assembly template
- Chain control conversion kit (where applicable)

TECHNICAL FEATURES:

- ABS plastic body with anti-age treatment
- 9-litre capacity with 6-litre flush feature
- Right, left and central rear fitting
- Norma float valve (some models with plastic fitting) noise level less than 12 dB
- Single button with flush-saving feature
- Possible high-level installation with chain control
- Possible plumbing fitting from the bottom

ACCESSORIES:

- Pneumatic lifting device (standard for art. 334240 art. 334030)
- Pneumatic control (standard supplied for item 334240)
- Stop valve for universal installation
- Anti-condensate and soundproofing insulation



Super Duo

dual flush

DESCRIPTION:

- WC cistern for low-or medium-level installations

TECHNICAL FEATURES:

- ABS body with anti-age treatment
- 9-litre capacity with 6-litre flush feature
- Anti-condensate and soundproofing insulation
- Right, left and central rear plumbing fitting
- Float noise level less than 12 dB
- 3/6-6/9 litre dual-flush button
- A new system for further adjustment of partial flush
- from 3,5 litres to minimum 1 litre

SUPPLIED STANDARD:

- Stop valve for universal installation
- Kit of wall fixing accessories
- Flush pipe
- Coupling gaskets
- Assembly template



Lux monoblocco

single flush

DESCRIPTION:

- WC cistern for monobloc installations

TECHNICAL FEATURES:

- ABS body with anti-age treatment
- 9-litre capacity with 6-litre flush feature
- Anti-condensate and soundproofing insulation
- Right, left or rear central plumbing fitting
- Float noise level less than 12 dB
- Single button with flush-saving feature
- Cistern with universal fittings suitable of all types of monobloc pans

SUPPLIED STANDARD:

- Stop valve
- Kit of wall fixing accessories
- Connection gaskets

ACCESSORIES:

- Lifting device
- Pneumatic control



Biblo Classic

single flush

DESCRIPTION:

- WC cistern for low-or medium-level installations

TECHNICAL FEATURES:

- ABS body with anti-age treatment
- 9-litre capacity with 6-litre flush feature
- Anti-condensate and soundproofing insulation
- Right or left plumbing fitting
- Float noise level less than 12 dB
- Central full-flush button

SUPPLIED STANDARD:

- Stop valve
- Kit of wall fixing accessories
- Flush pipe
- Coupling gaskets
- Assembly template

ACCESSORIES:

- Pneumatic lifting device (standard for art. 336301)
- Pneumatic control



Biblo Uno

single flush

DESCRIPTION:

- WC cistern for low-or medium-level installations

TECHNICAL FEATURES:

- ABS body with anti-age treatment
- 9-litre capacity with 6-litre flush feature
- Anti-condensate and soundproofing insulation
- Right, left and central rear plumbing fitting
- Possible plumbing fitting from the bottom
- Float noise level less than 12 dB
- Single button with flush-saving feature

SUPPLIED STANDARD:

- Stop valve for universal installation
- Kit of wall fixing accessories
- Flush pipe
- Assembly template

ACCESSORIES:

- Pneumatic lifting device
- Pneumatic control



Biblo Duo

dual flush

DESCRIPTION:

- WC cistern for low-or medium-level installations

TECHNICAL FEATURES:

- ABS body with anti-age treatment
- 9-litre capacity with 6-litre flush feature
- Anti-condensate and soundproofing insulation
- Right, left and central rear plumbing fitting
- Float noise level less than 12 dB
- 3/6 - 6/9 litre dual-flush button
- A new system for further adjustment of partial flush from 3,5 litres to minimum 1 litre

SUPPLIED STANDARD:

- Stop valve for universal installation
- Kit of wall fixing accessories
- Flush pipe
- Connection gaskets
- Assembly template

ACCESSORIES:

- Lifting device
- Pneumatic control



Kariba 2008 mono

single flush

DESCRIPTION:

- WC cistern for low-or medium-level installations

TECHNICAL FEATURES:

- ABS body with anti-age treatment
- 9-litre capacity with 6-litre flush feature
- Anti-condensate and soundproofing insulation
- Right or left plumbing fitting
- Float noise level less than 12 dB
- Single button with flush-saving feature

SUPPLIED STANDARD:

- Stop valve
- Kit of wall fixing accessories
- Flush pipe
- Coupling gaskets
- Assembly template

ACCESSORIES:

- Rear plumbing fitting
- Pneumatic lifting device (standard for art. 325104)
- Pneumatic control



Kariba 2008 Duo

dual flush

DESCRIPTION:

- WC cistern for low-or medium-level installations

TECHNICAL FEATURES:

- ABS body with anti-age treatment
- 9-litre capacity with 6-litre flush feature
- Anti-condensate and soundproofing insulation
- Right or left plumbing fitting
- Float noise level less than 12 dB
- Dual button with flush-saving feature

SUPPLIED STANDARD:

- Stop valve
- Kit of wall fixing accessories
- Flush pipe
- Coupling gaskets
- Assembly template

ACCESSORIES:

- Pneumatic lifting device (standard for art. 325104)
- Pneumatic control



Top Duo

dual flush

DESCRIPTION:

- WC cistern for low-or medium-level installations

TECHNICAL FEATURES:

- ABS body with anti-age treatment
- 9-litre capacity with 6-litre flush feature
- Anti-condensate and soundproofing insulation
- Right, left and central rear plumbing fitting
- Float noise level less than 12 dB
- 3/6 - 6/9 litre dual-flush button
- A new system for further adjustment of partial flush

SUPPLIED STANDARD:

- Stop valve for universal installation
- Kit of wall fixing accessories
- Flush pipe
- Connection gaskets
- Assembly template

ACCESSORIES:

- Lifting device
- Pneumatic control



Slim

single flush

DESCRIPTION:

- WC cistern for low or medium level. Just 105 mm of thickness.

SUPPLIED STANDARD:

- Stop valve "J" universal use
- Kit of fix wall accessories
- Flush pipe Ø 50 to 40 mm
- Coupling gaskets
- Assembly template

TECHNICAL FEATURES:

- Body with anti-age treatment
- 105 mm thickness body 6/9- litres capacity
- Start/stop function – Single button with flush-saving feature
- Left – right or rear plumbing fittings
- Body structure anti-condensate and soundproofing insulation
- Norma float valve noise less than 12 db



Ego Duo

dual flush

DESCRIPTION:

- WC cistern for low-or medium-level installations

SUPPLIED STANDARD:

- Stop valve
- Connection gaskets

TECHNICAL FEATURES:

- ABS body with anti-age treatment
- 9-litre capacity with 6-litre flush feature
- Anti-condensate and soundproofing insulation
- Right, left or rear plumbing fitting
- Float noise level less than 12 dB
- Possible to change both the buttons available in some colours

ACCESSORIES:

- Lifting device
- Pneumatic control



Eura alta

single flush

DESCRIPTION:

- WC cistern for high-level installations

TECHNICAL FEATURES:

- ABS body with anti-age treatment
- 9-litre capacity with 6-litre flush feature
- Anti-condensate and soundproofing insulation
- Right or left plumbing fitting
- Float noise level less than 12 dB
- Chain control (where applicable)

SUPPLIED STANDARD:

- Stop valve
- Kit of wall fixing accessories
- Connection gaskets

ACCESSORIES:

- Lifting device and pneumatic control (standard supplied in item 384020)
- Flush pipes for high-level cisterns





Angolo

single flush

DESCRIPTION:

- Cistern for corner installations

TECHNICAL FEATURES:

- Plastic body
- 9-litre capacity with 6-litre flush feature
- Right or left plumbing fitting
- Float noise level less than 12 dB
- Single button with flush-saving feature

SUPPLIED STANDARD:

- Stop valve
- Kit of wall fixing accessories
- Flush pipe
- Connection gaskets



concealed

washing system for toilet wall

cisterns

serie Monolith 2011
Pratika system

monolith 2011

APPLICATION:

- Concealed cistern, for all kind of installation, from brickwork to plasterboard

TECNICAL FEATURES:

- High-density PE monobloc cistern with a nominal thickness of 75 mm
- 9-litres capacity
- Can be repaired if perforated
- Plaster mesh
- Extruded closed-cell PE insulation, anti-condensate, soundproofing, with thermal resistance -40°C to + 90°C
- Flush valve with silicone gasket
- Float noise level less than 12 dB
- Switching from manual to pneumatic control
- Components accessible and removable without the need for special tools
- Possible discharge flush from 9 to 3 litres

SUPPLIED STANDARD:

- 3/8"-3/8" stop valve with gasket, M 1/2" down fitting
- Fixing brackets
- Building site rubble protection
- Telescopic insulated polystyrene down pipe with 225-335 mm, adjustment and universal tapered gasket

ACCESSORIES:

- Pan connector
- Start-stop control plate
- Dual-flush plate for water saving
- Pneumatically controlled lifting device



teKno pratika

APPLICATION:

- Self-supporting mounting frame for wall-mounted pans, designed for floor installation, with height adjustment
- Suitable for installation in lightweight, dry-coated or brick walls

TECHNICAL FEATURES:

- Overall thickness 100mm
- 9-litres HDPE one-piece body cistern
- Can be replaced if perforated
- Plaster mesh
- Extruded closed-cell PE insulation, anti-condensate, soundproofing, with thermal resistance -40°C to +90°C
- Structure tested to withstand 400 kg. to standard, if installed correctly
- Frame height 1270-1480 mm, thickness 50mm
- Flush valve with bottom silicone gasket
- Float valve noise level less than 12 dB
- Possible discharge flush from 9 to 3 litres

SUPPLIED STANDARD:

- Painted tubular stainless frame
- Telescopic legs, height adjustable 3-250mm
- 180-230mm adjustable fixings
- M12 threaded bars for pan fixing
- 9-litres Monolith 2011 concealed cistern
- Pipe and fitting kit for connecting to a wall-mounted pan
- 90mm black HDPE weld sleeve with gasket
- 90mm black HDPE 90° weld bend
- Fixing and assembly kit

ACCESSORIES:

- Start-stop control plate
- Dual-flush plate for water saving
- Pneumatically controlled lifting device
- 110-100mm PVC bend on demand



fix pratika

fix pratika 3 plus

APPLICATION:

- Mounting frame for wall-mounted pans designed for in/on-wall installation
- Not suitable for installations in lightweight

TECHNICAL FEATURES:

- Overall thickness 80 mm
- 9-litres HDPE monobloc cistern
- Can be replaced if perforated
- Plaster mesh
- Extruded closed-cell PE insulation, anti-condensate, soundproofing, with thermal resistance -40°C to $+90^{\circ}\text{C}$
- Flush valve with silicone gasket
- Float valve noise level less than 12 dB
- Structure tested to withstand 400 kg according to standards if installed correctly
- Possible discharge flush from 9 to 3 litres

SUPPLIED STANDARD:

- 10/10 galvanized steel frame with 4 lateral fixing brackets
- 30/10 galvanized steel frame with 4 lateral fixing brackets (version Fix Pratika 3 Plus) 180-230mm adjusting fixing
- M12 threaded bars for pan fixing
- Monolith 2011 - 9-litre concealed cistern
- Pipe and fitting kit for connecting to a wall-mounted pan
- 90mm black HDPE weld sleeve with gasket
- 90mm black ADPE 90° weld bend
- Fixing and assembly kit
-

ACCESSORIES:

- Pair of frame legs
- Start-stop control plate
- Dual-flush plate for water saving
- Pneumatically controlled lifting device
- 100-100mm PVC bend on demand



karton pratiKa

APPLICATION:

- Mounting frame for wall-mounted pans, designed for installation in plaster (lightweight) walls

TECHNICAL FEATURES:

- Overall thickness 100mm
- 9-litres HDPE one-piece body cistern
- Can be replaced if perforated
- Plaster mesh
- Extruded closed-cell PE insulation, anti-condensate, soundproofing, with thermal resistance -40°C to $+90^{\circ}\text{C}$
- Structure tested to withstand 400 kg. to standard, if installed correctly
- Two-piece modular structure
- Flush valve with silicone gasket
- Float valve noise level less than 12 dB
- Possible discharge flush from 9 to 3 litres

SUPPLIED STANDARD:

- Galvanized pre-drilled steel frame, overall width 100mm
- 180-230mm adjustable fixings
- M12 threaded bars for pan fixing
- 9-litre Monolith 2011 concealed cistern
- Telescopic down pipe
- Pipe and fitting kit for connecting to a wall-mounted pan
- 90mm black HDPE weld sleeve with gasket
- 90mm black HDPE 90° weld bend
- Fixing and assembly kit

ACCESSORIES:

- Start-stop control plate
- Dual-flush plate for water saving
- Pneumatically controlled lifting device
- 110-100mm PVC bend on demand



cover

for concealed cisterns
Monolith 2011
Pratika System



plates

Classic line
Biblo line



CLASSIC cover plates - dual flush



306400



306401



306402



306403



306404



306405



CLASSIC cover plates - single flush



306300



306301




306302



306303



306304

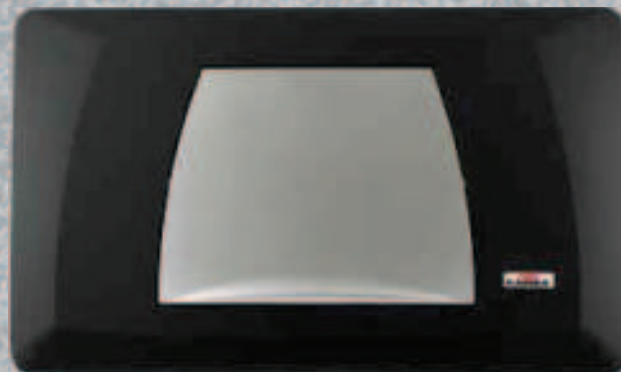

306305

Biblo cover plates - dual flush



306200



306201



306202



306203



306204



306205



Biblo cover plates - single flush




306100



306101



306102

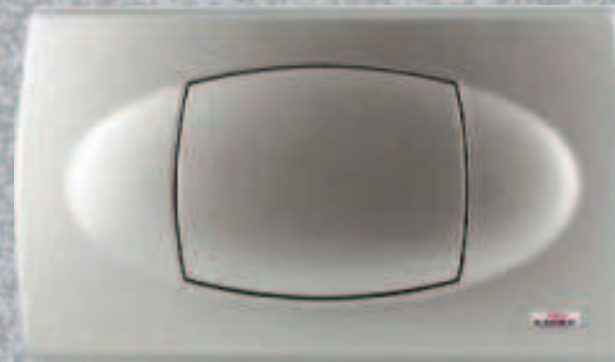

306103



306104




306105

wall

A photograph of a white ceramic toilet in a bathroom. The floor is covered in red square tiles with black grout. The toilet is positioned diagonally across the frame. The word "frames" is written in a light gray, lowercase, sans-serif font across the middle of the toilet. The lighting is bright, casting soft shadows.



frames

universal brickwork mounting frames


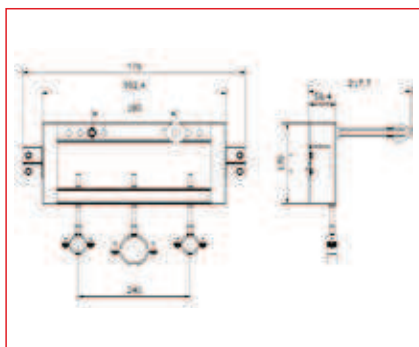


CODE. 369064 Universal brickwork frame for bidet/washbasin.



brickwork mounting frames

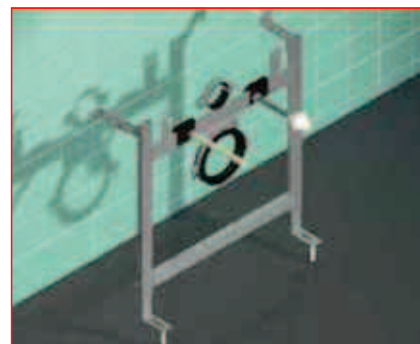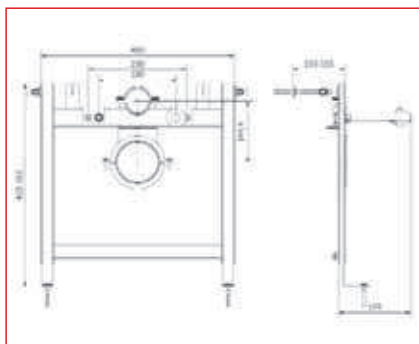

CODE. 369052 Universal galvanised section frame for wall-mounted pan

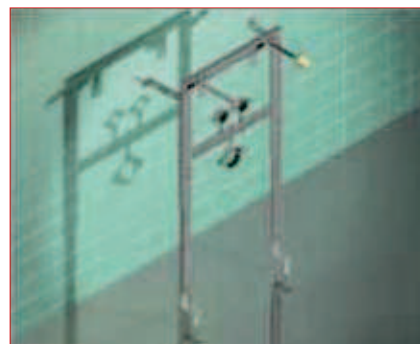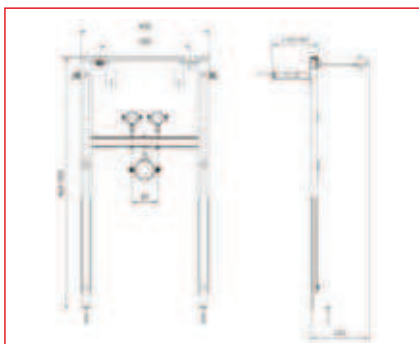


CODE. 369053 Universal galvanised section frame for wall-mounted washbasin.

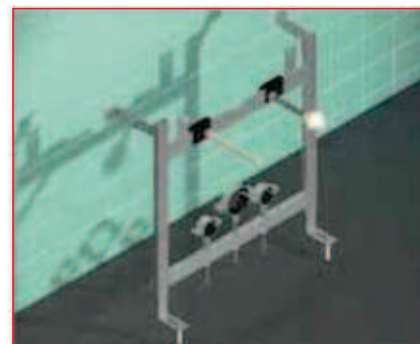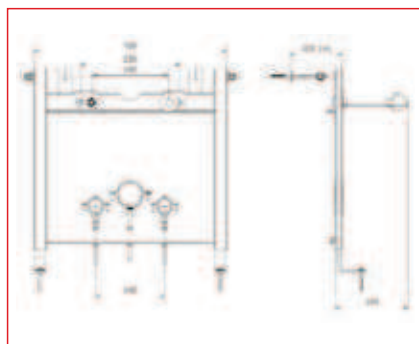


CODE. 369063 Universal galvanised section frame for wall-mounted bidet.

structures for modular mounting frames

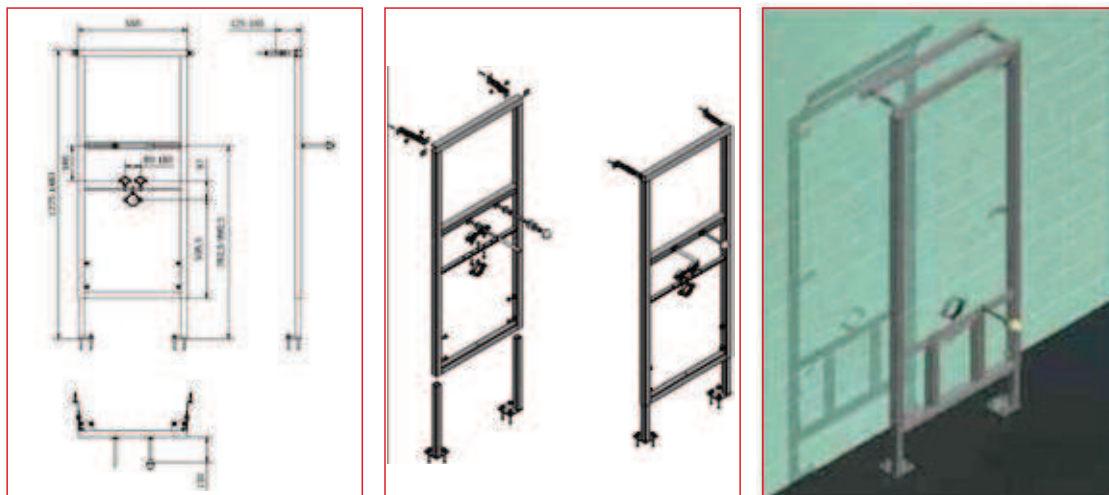


CODE. 369065 Modular painted polished frame for wall-mounted washbasin

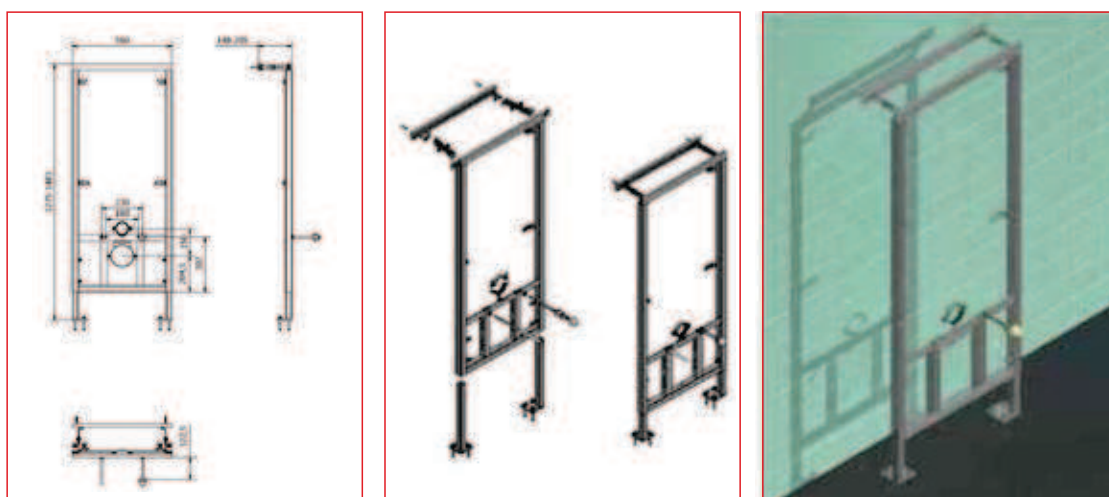

CODE 369066 Modular painted polished frame for wall-mounted bidet

plaster mounting frames

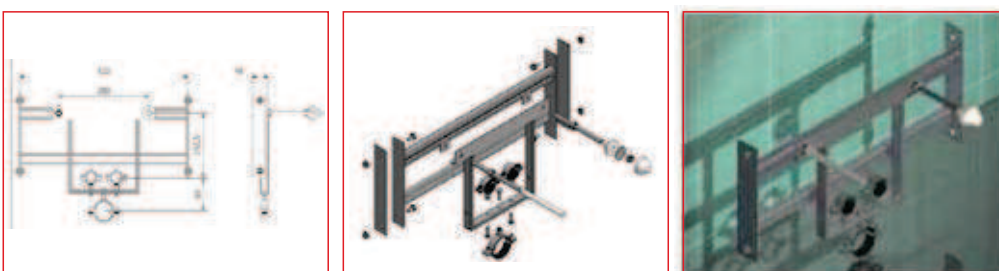

CODE 369057 Universal galvanized section frame for wall-mounted washbasin.



COD. 369055 Universal galvanized section frame for wall-mounted bidet.

accessories

float valve

“tirette” control

pneumatic remote control

flush pipes

stop valves



Norma float valve



APPLICATION

Adaptable to and compatible with all plastic and ceramic cisterns

TECHNICAL FEATURES

Made of corrosion lime-resistant materials

Adjustable 6/9 litre flush

Noise level less than 12 dB

Fast filling equal to 0,12 litres/sec. with water supply from a 3/8" pipe union

Silent float valve



APPLICATION

Adaptable to all plastic and ceramic cisterns with plumbing fitting at the bottom

TECHNICAL FEATURES

Made of corrosion lime-resistant materials

Adjustable 6/9 litre flush

Noise level less than 14 dB

Fast filling equal to 0,14 litres/sec. with water supply from a 3/8" pipe union

Tirette actuator



APPLICATION

Universal actuator for ceramic cisterns with central hole on the cover

TECHNICAL FEATURES

Control with start-stop flush feature

Adjustable from 400 to 440mm

Pneu actuators



APPLICATION

Adaptable to all plastic and ceramic cisterns, with or without fixing to the cover

TECHNICAL FEATURES

- A) Pneumatic body with control for monobloc ceramic cisterns, with fixing to the cover
- B) Pneumatic body suitable for high-level cisterns, Ø 32-50mm, or close-coupled Ø 50mm

Lifting device



APPLICATION

Adaptable to all external Kariba cisterns (except SLIM)

Stop valves



Stop valve 1/2-3/8" "J"



Stop valve 1/2-3/8" "Angle"



Stop valve 3/8"-3/8" "Angle"

Pneumatic remote control for Kariba external cisterns



COMPLET
SET

PULSANTE PNEU INCASSO BIANCO CONFEZIONATO



COMPLET
SET

PULSANTE PNEU ESTERNO BIANCO CONFEZIONATO



COMPLET
SET

COMANDO PNEU PEDALE BIANCO PAV/PARETE



COMPLET
SET

PULSANTE PNEU PEDALE ESTERNO INOX PAV/PARETE

pneumatic remote control for ceramics cisterns



COMPLET
SET

COMANDO PNEU CROMATO PER CASSETTA CERAMICA

Pneumatic kit for Monolith 2011 and Pratika System



COMPLETE
SET

PNEUMATIC CONVERSION KIT WITH EXTERNAL WHITE BUTTON



COMPLETE
SET

PNEUMATIC CONVERSION KIT WITH WHITE FLUSH BUTTON



COMPLETE
SET


PNEUMATIC CONVERSION KIT WITH STAINLESS STEEL WALL/FLOOR FOOT CONTROL



COMPLETE
SET

PNEUMATIC CONVERSION KIT WITH WHITE WALL/FLOOR FOOT CONTROL

Flush pipes

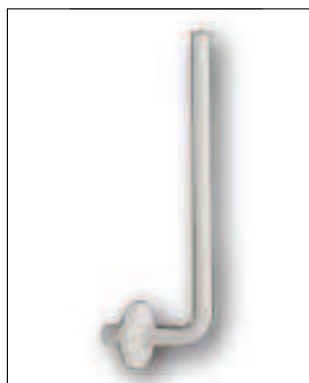

90° ELBOW, Ø 32MM.



SLEEVE FOR Ø 32MM




BRASS CHROMED ELBOW



EURA FLUSH PIPE, Ø 32MM

EURA FLUSH PIPE, Ø 32MM FOR SQUATTING

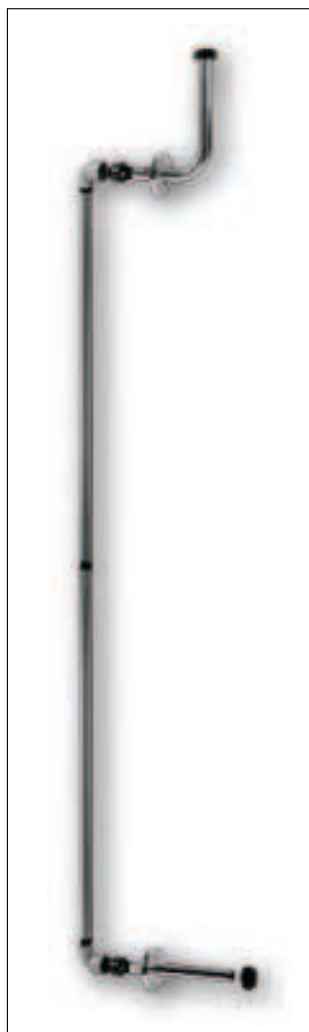


IN-WALL FLUSH PIPE




DISTRIBUTION TERMINAL

Flush pipes

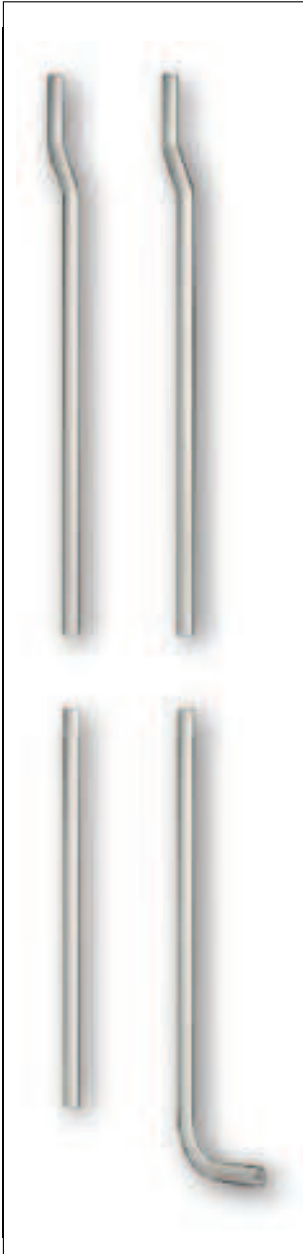


KOMBI FLUSH PIPE, Ø 32MM
FOR SQUATTING LAVATORY


KOMBI FLUSH PIPE, Ø 32MM FOR PAN

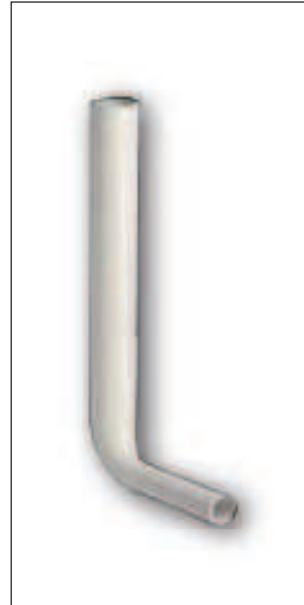

DISCHARGE PIPE 50x32x600MM

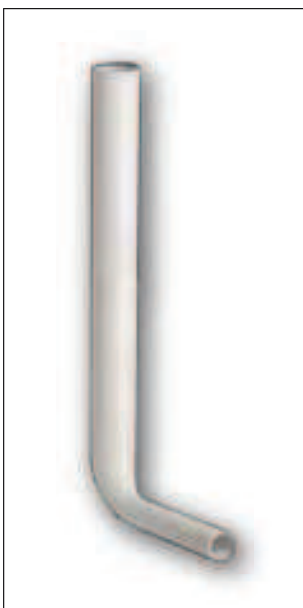

DISCHARGE PIPE 50x32x1000MM

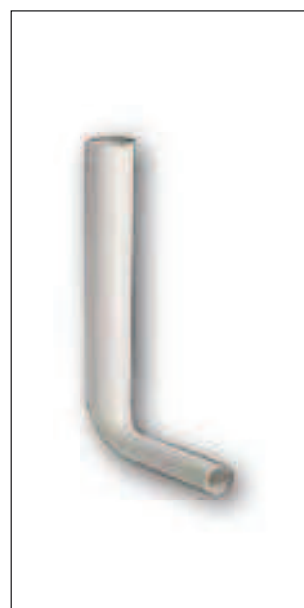


DISCHARGE PIPE 50x32x325MM

Flush pipes



MODULAR PIPE 50x32x980MM 45°

ELBOW, MEDIUM-HIGH-LEVEL

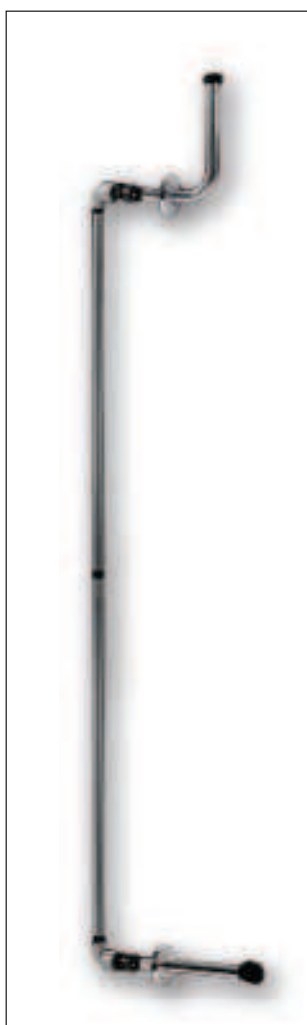

CATIS CHROME PIPE

Flush pipes for concealed cisterns



CORNER PIPE FOR MONOLITH 2011

E PRATIKA SYSTEM

Pipe connectors



PIPE CONNECTOR



PIPE CONNECTOR WITH CLAMP



Products List

Exposed cisterns

MODEL	CODE	DESCRIPTION
Super E	334210	White — high position with chain — flush pipe Ø 32 mm —floating valve with plastic nipple. 3/8' Without stop valve and insulation
Super E	334212	White — high position with chain — flush pipe Ø 32 mm —floating valve with plastic nipple. 1/2' Without stop valve and insulation
Super E	334216	White — high position with chain — flush pipe Ø 32 mm —floating valve with plastic nipple. Without stop valve and insulation Set at 6 litres
Super E	334311	White — low-medium position, with flush pipe Ø 40 mm - without stop valve and insulation. Floating valve with plastic nipple
Super E	334030	White, low-medium position, pneumatic without remote control - Pipe Ø 40 mm
Super E	334240	White - Pipe Ø 40 mm. fully equipped
Super E	334054	White - low position single flush for saving water, pipe Ø 40 mm. fully equipped - bottom left fitting
Super E	334043	White - low position single flush for saving water, pipe Ø 40 mm. fully equipped - bottom right fitting
Super Kariba	334008	White - low-medium position single flush for saving water, pipe Ø 40 mm. fully equipped
Super Duo	334100	White - low-medium position double flush for saving water, pipe Ø 40 mm. without stop valve
Super Duo	334101	White - low-medium position , pipe Ø 40 mm fully equipped
Biblo Classic	336300	White - low-medium position, Pneumatic without remote control - Pipe Ø 40 mm
Biblo Classic	336301	White - low-medium position, Pipe Ø 40 mm - without stop valve
Biblo Classic	336311	White - low-medium position, Pipe Ø 40 mm. fully equipped
Biblo Uno	336400	White, low-medium position - Pipe Ø 40 mm. - without stop valve
Biblo Uno	336411	White - low-medium position double flush for saving water, pipe Ø 40 mm. fully equipped
Biblo Duo	336500	Champagne - low-medium position Double flush for saving water, pipe Ø 40 mm. fully equipped
Biblo Duo ch	336500 ch	White - low-medium position Double flush for saving water, Pipe Ø 40 mm - without stop valve
Biblo Duo	336511	White - low-medium position , pipe Ø 40 mm fully equipped
Kariba 2008	325101	White - low-medium position Pipe Ø 40 mm - without stop valve
Kariba 2008	325102	White , low-medium position- Pneumatic - without remote control - Pipe Ø 40 mm
Kariba 2008	325104	White - low-medium position Double flush for saving water, pipe Ø 40 mm. fully equipped
Kariba 2008 Duo	325120	White - low-medium position Double flush for saving water, pipe Ø 40 mm. fully Pipe Ø 40 mm without stop valve
Kariba 2008 Duo	325111	White, Monoblock , fully equipped
K Lux	335000	Champagne Monoblock , fully equipped
K Lux	335000 ch	White - Monoblock, without stop valve
K Lux	335001	White - Monoblock, without stop valve
Top Duo	336200	White - low-medium position Double flush for saving water, pipe Ø 40 mm. fully equipped
Top Duo	336217	White - low-medium position Double flush for saving water, pipe Ø 40 mm. fully equipped
Top Duo ch	336200 ch	Champagne - low-medium position Double flush for saving water, pipe Ø 40 mm. fully equipped
Slim*	810001	White - Pipe Ø 40 mm fully equipped
Ego Duo	337101	White - low-medium position Double flush for saving water, pipe Ø 40 mm. fully equipped
Eura Alta	334080	White — High position with chain — with insulation - fully equipped
Eura Alta	334090	White — High position with chain - without stop valve — without cover
Eura Alta	334020	White, High position , Pneumatic without remote control - Pipe Ø 40 mm
Kombi	316010	White — High position with chain - without stop valve — without cover

* Available only standard version - Article subject to sales restrictions

In wall cisterns and frame

MODEL	CODE	DESCRIPTION
TeknopratiKa	368307	In-wall cistern with self-bearing frame, fully equipped with PVC elbow and sleeve Ø 100 mm
TeknopratiKa	368311	In-wall cistern with self-bearing frame, fully equipped with PVC elbow and sleeve Ø 100 mm
TeknopratiKa	368306	In-wall cistern with self-bearing frame, fully equipped with HDPE elbow and sleeve Ø 90 mm and adaptor 90-110
Fix PratiKa 3 plus	368327	In-wall cistern with frame 3 mm, fully equipped with PVC elbow and sleeve Ø 100 mm
Fix PratiKa	368360	In-wall cistern with frame 1 mm, fully equipped with HDPE elbow and sleeve Ø 90 mm
Fix PratiKa 3 plus	368320	In-wall cistern with frame 3 mm, fully equipped with HDPE elbow and sleeve Ø 90 mm
Karton PratiKa	368308	In-wall cistern with frame for plasterboard, fully equipped with HDPE elbow and sleeve Ø 90 mm and adaptor 90-110
Monolith2011	365401	In-wall cistern, fully equipped
Monolith2011	365101	In-wall cistern, fully equipped without insulation

BIBLO and CLASSIC Cover Plates (for Monolith 2011 and PratiKa system)

MODEL	CODE	DESCRIPTION
Classic Mono	306300	Single Flush white
	306301	Single flush chrome
	306302	Single flush matt chrome
	306303	Single flush titanium
	306304	Single flush soft noir
	306305	Single flush mixed soft noir – matt chrome (button)
	306300PSP	Single flush white to integrate pneumatic system
Classic Duo	306400	Dual Flush white
	306401	Dual flush chrome
	306402	Dual flush matt chrome
	306403	Dual flush titanium
	306404	Dual flush soft noir
	306405	Dual flush mixed soft noir – matt chrome (button)
Biblo Duo	306100	Single Flush white
	306101	Single flush chrome
	306102	Single flush matt chrome
	306103	Single flush titanium
	306104	Single flush soft noir
	306105	Single flush mixed soft noir – matt chrome (button)
Biblo Duo	306100PSP	Single flush white to integrate pneumatic system
	306200	Dual Flush white
	306201	Dual flush chrome
	306202	Dual flush matt chrome
	306203	Dual flush titanium
	306204	Dual flush soft noir
	306205	Dual flush mixed soft noir – matt chrome (button)

Wall frame

MODEL	CODE	DESCRIPTION
Wall frame	369064	universal Brickwork Frame For Bidet/washbain
	369052	Universalgalvanized Section Frame For Wall-mounted Pan
	369053	Universalgalvanized Section Frame For Washbasin
	369063	Universal Galvanized Section Frame For Bidet
	369065	Modular Painted Polished Frame For Wall Mounted Forwashbasin
	369066	Modular Painted Polished Frame For Wall Mounted For Bidet
	369057	Universal Galvanized Section Frame For Wall-mounted Pan Suitable For Plasterboard
	369055	Universal Galvanized Section Frame For Wall-mounted Bidet Suitable For Plasterboard

Accessories

MODEL	CODE	DESCRIPTION
Norma Float valve	300385	Norma Float Valve brass fitting 1/2
	300386	Norma Float Valve brass fitting 3/8 for ceramics cistern
	300388	Norma Float Valve brass fitting 3/8 for concealed cisterns
	300390	Norma Float Valve plastic fitting 3/8
Silent Float valve	300040	Silent Float Valve 3/8 for low fitting (plastic)
	300041	Silent Float Valve 1/2 for low fitting (plastic)
Tirette actuator	410044	Tirette control with chrome button
Pneu actuators	400160	Pneumatic white actuator with control for monobloc ceramics cistern
	400162	Pneumatic chrome actuator with control for monobloc ceramics cistern
	400220	Double pneumatic actuator control for monobloc ceramics cistern
	400330	Double pneumatic actuator control for monobloc ceramics cistern with float valve
Pneumatic lifting	400021	Pneumatic lifting device for EXTERNAL Kariba cisterns (Except SLIM)
Stop valves	300802	Stop valve 1/2 - 3/8" "J" brass pipe
	300801	Stop valve 1/2 - 3/8" "Angle" brass pipe
	300800	Stop valve 3/8" - 3/8" "Angle" brass pipe
Pneumatic kit for Kariba External Cisterns	400101	Inside-wall white pneumatic Kit for Kariba external cisterns
	400106	Inside-wall chrome pneumatic Kit for external Kariba cisterns
	400103	External white pneumatic Kit for external Kariba cisterns
	400110	Pneumatic wall/floor steel Kit for externals Kariba cisterns
	400111	Pneumatic wall/floor plastic Kit for externals Kariba cisterns
Pneumatic Kit for Concealed cisterns	400187	Pneumatic conversion Kit for Monolith 2011 with external white button
Monolith 2011 and PratiKa System	400180	Pneumatic conversion Kit for Monolith 2011 with inside-wall white button
	400181	Pneumatic conver. Kit for Monolith 2011 with inside-wall chrome button
	400184	Pneumatic conversion kit with stainless steel wall/floor control
	400185	Pneumatic conversion kit with plastic wall/floor control

Flush pipes

MODEL	CODE	DESCRIPTION
90° Elbow, Ø 32mm	243322	90° Elbow, Ø 32mm, With Washer, For High-level Cisterns, White
	243326	90° Elbow, Ø 32mm, With Washer, For High-level Cisterns, Polished Chrome
Brass Chromed Elbow	243330	Brass Chromed Elbow G45 Ø 30x110x140
In-wall Flush Pipe	253332	In-wall Flush Pipe, With 90° Elbow , Ø 32mm Connecting Pipe And Washer, Withe
	253333	In-wall Flush Pipe, With 90° Elbow, Ø 32mm Connecting Pipe And Washer, Polished Chrome
Sleeve For Ø 32 Mm	253335	Sleeve For Ø 32 Mm Pipes, White
	253335CH	Sleeve For Ø 32 Mm Pipes, Champagne
Distribution Terminal	243000	Distribution Terminal For Squatting Lavatory
Kombi Flush Pipe	243404	Flush Pipe, Ø 32mm For Squatting Lavatory, White, For Kombi
	243403	Flush Pipe, Ø 32mm For Pan, White, For Kombi
Discharge Pipes	215313	Flush Pipe 50x32x1000mm, White
	215313CH	Flush Pipe 50x32x1000mm, Champagne
	215363	Flush Pipe 50x32x600mm, White
	215363CH	Flush Pipe 50x32x600mm, Champagne
	205332	Flush Pipe 50x32x325mm, Normal, Polished Chrome
	205333	Flush Pipe 50x32x325mm, Normal, White
	205333CH	Flush Pipe 50x32x325mm, Normal, Champagne
	205433	Flush Pipe 50x40x325mm, Normal, White
	205433CH	Flush Pipe 50x40x325mm, Normal, Champagne
Modular Pipes	255353	Modular Pipe 50x32x980mm 45° Elbow, Medium-high-level, White
	255353CH	Modular Pipe 50x32x980mm 45° Elbow, Medium-high-level, Champagne
Catis Chrome Pipe	253334	Chrome Pipe For Catis Cisterns (Half Concealed)
Monolith 2011 Corner Pipe	305120	Corner Pipe With Insulation Cover For Monolith 2011 And Pratika System (From 12 - 2010)
Pipes Connectors	204001	Pipe Connector With Washer And Clamp, Ø 32mm, White
	204002	Pipe Connector With Washer And Clamp, Ø 32mm, Polished Chrome
	204006	Pipe Connector With Washer And Clamp, Ø 40mm, White
	204007	Pipe Connector With Washer And Clamp, Ø 40mm, Polished Chrome
	204015	Pipe Connector With Clamp Ø 40mm
	204016	Pipe Connector With Clamp Ø 32mm

Notes

This image shows a full page of blank, lined paper. It features approximately 30 evenly spaced horizontal grey lines across its entire surface, typical of notebook or legal stationery. The paper is otherwise completely empty, with no text, markings, or illustrations.